


VACCINE REFRIGERATOR

Ask for a
Quotation

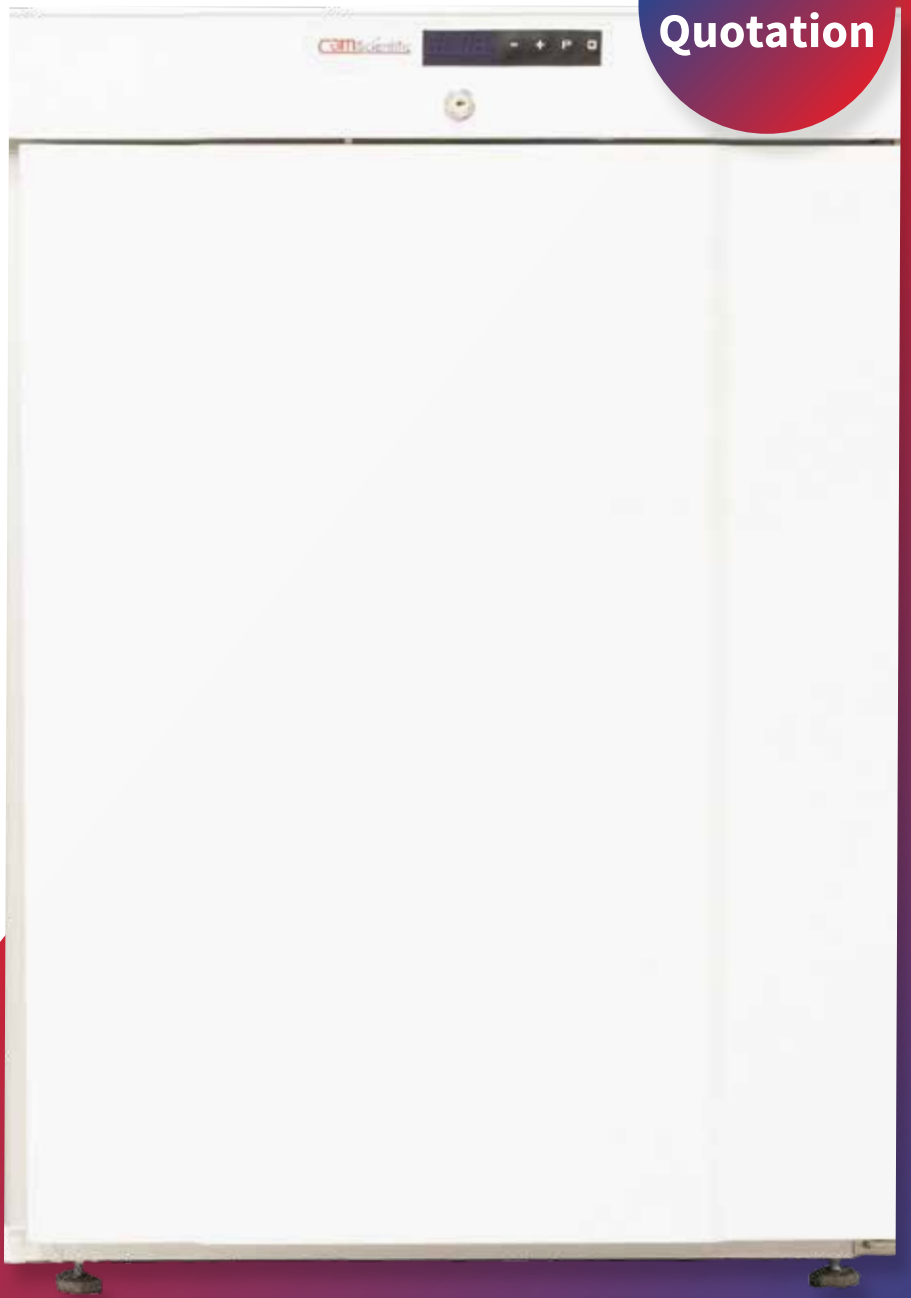

125ltr

- Glass door option available.
- Temperature: +2/+8°C.
- Gross Volume: 125 ltr.
- 5 Year Parts & Labour Warranty.

We're Scotland's leading scientific calibration, maintenance and validation company providing engineering support and consultation to a variety of organisations. Based in Livingston, we see your business as our business, helping our clients maintain their research platforms, adhere to accreditation standards and provide maintenance & support on temperature controlled equipment, centrifuges and more.

Accredited to ISO 9001, ISO 17025 & ISO 14001 as well as adhering to FDA and MHRA standards we consider ourselves your one stop shop for instrument servicing, repair and replacement of laboratory equipment.

Our team of engineers are trained to the highest level to deliver our wide range of technical services. We provide a call out service and welcome your enquiries by telephone or email. Get in touch to learn more about how we can service and support your laboratory operations. As well as how we can consult with you to address any issues or regulatory requirements you may have.

UK Head Office
 1 Brewster Sq
 Brucefield Industrial Estate
 Livingston
 West Lothian
 EH54 9BJ

Tel: 01506 463 734
Email: info@cmscientific.co.uk
Web: www.cmscientific.co.uk

Overview

Lower height 125wrv models are designed to fit under worktops in laboratory workplaces. With their width of 60cm, depth of 64cm and height of just 83cm, these cabinets are ideal where space is limited.

Features

- Equipped with right hand hinged reversible door with lock and 3 grey shelves.
- Materials Exterior / Interior: White / ABS lining white.

Options

- Glass or Solid Door Options.
- Stacking kit for 125 Models.
- Castors on stacking kits.
- Porthole for sensor access.
- Drawer systems available on 125, 346, 583 models.

Specifications

Variable	Value
Model number	125wr
Category	Storage Cabinets
Type	Refrigerator
Line	Undercounter
Product Model	125wr
Equipped with	Right hand hinged reversible door with lock, 3 grey shelves. Exterior: Stainless. Interior: ABS lining in grey
Temperature range	+2/+8°C
Volume, gross	125 ltr
Net usable volume	76 ltr
Ex Dim. W x D x H, mm	595 x 640 x 830
Weight, packed	46kg
Refrigerant	GWP R 600 a (isobutane)/3
Ref. capacity at -10°	154 Watt
Connection	230 V, 50 Hz
Connection load	99 Watt
Energy Efficiency	Class A
Energy consumption / year	(AEC) 322 kWh
Sound level	36.5 dB(A)